



The need to protect occupied spaces from airborne pathogens has never been greater. Fortunately, Fresh-Aire UV germicidal lights have been proven to neutralize viruses, mold, and bacteria within seconds of exposure.

The Fresh-Aire UV Aire-Foil features 15" - 60" high-output UVC lamps and is wall-mounted near ceiling height. Upper air UV-C disinfection is an ideal method to mitigate the spread of microorganisms in occupied spaces. As air naturally heats and cools it moves by convection, which continuously circulates it throughout the space. Airborne viruses and bacteria are sterilized when exposed to the UVC light field.

The Aire-Foil unit is installed at a minimum height of 7' and is designed with louvers that shield occupants from UV exposure by projecting UVC light rays parallel to the plane of the ceiling.

DESIGNED &

ASSEMBLED IN THE U.S.A.

INTERNATIONAL



Safe	Louvered UVC light is safe for occupied spaces Produces no harmful ozone			
Effective	Neutralizes airborne viruses & bacteria APCO technology for odor and VOC reduction			
Quiet	Air convection for silent operation			
Practical	Single UVC germicidal lamp length: 15", 24", 32", or 60" Quick & simple installation 2 year UVC lamp life			
Durable	Robust aluminum construction			
Lifetime Warranty	Ensures years of trouble free operation			







Neutralizes Mold, Bacteria, Viruses, and Allergens






AIRE-FOIL UPPER AIR UVC DISINFECTION

DIMENSIONS (15" model shown)

INTERNATIONAL

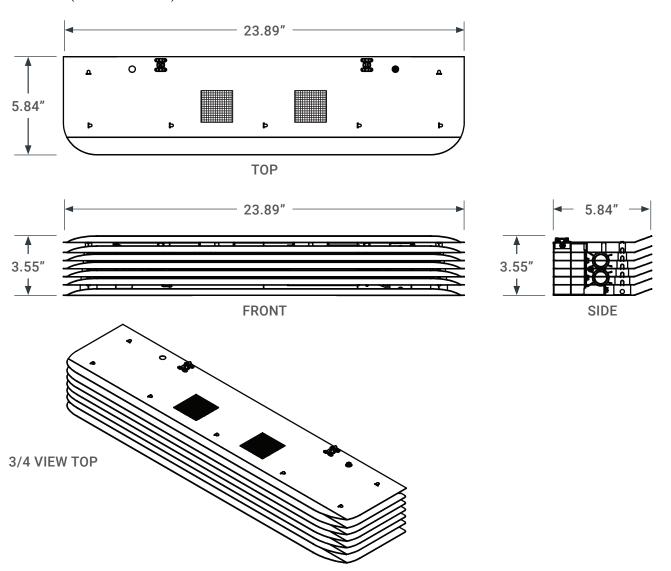

SPECS

0.100								
		Lamp	Dimensions			Electrical		Application Area
Model Numbers	CE Model Numbers		Width	Depth	Height	Input Watts	Voltage	
TUVC-UAFS-215S-HO	TUVC-UAFS-215S-HO-CE	15"	23.9	6.3	4.6	72w	110-277 VAC	100 sq. ft.
TUVC-UAFS-224S-HO	TUVC-UAFS-224S-HO-CE	24"	33.8	6.3	4.6	114w	110-277 VAC	260 sq. ft.
TUVC-UAFS-232S-HO	TUVC-UAFS-232S-HO-CE	32"	43.7	6.3	4.6	160w	110-277 VAC	390 sq. ft
TUVC-UAFS-260S-HO	TUVC-UAFS-260S-HO-CE	60"	71.0	6.3	4.6	260w	110-277 VAC	780 sq. ft.
Custom lamp options available.								

DISPLAY MODELS

	No UVC
15"	TUVC-UAFS-215S-D
32"	TUVC-UAFS-232S-D

